

12.000 SERIES

MAIN SWITCHES

SPECIFICATIONS:


ELECTRICAL CHARACTERISTICS: 3A with resistive load
120 or 250VAC. (S contact)

INSULATION RESISTANCE: minimum of 1.000 megaohms.

DIELECTRIC WITHSTAND: 1.000V(RMS) for 1 minute (minimum).



OPERATION TEMPERATURE: from 0°C to 55°C.

**Electric
controls**

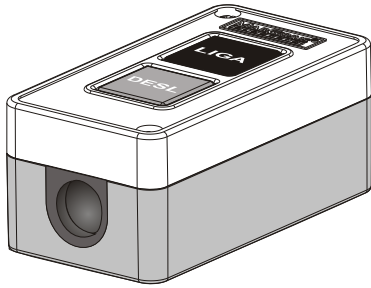


REFERENCE - 12005

DIMENSIONS

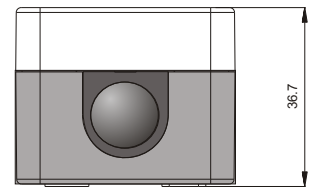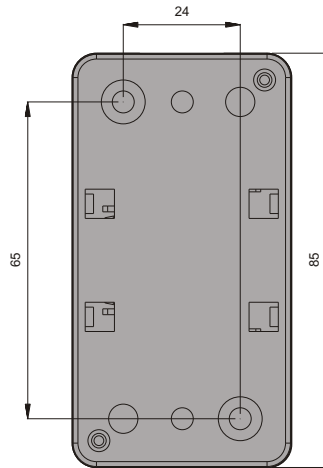


BOX

C1

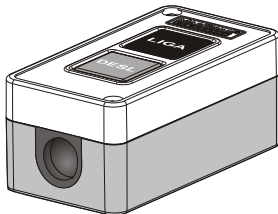

ACTUATOR

A1FE

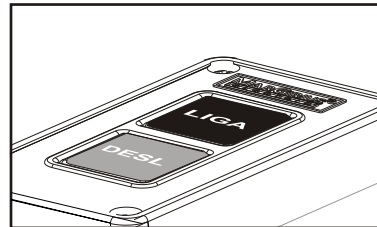

TERMINAL

P1 - Screw

CONTACTS

S - STANDARD

3A with resistive load 120 or 250VAC

COLORS

F - black
E - red

* For other options call us.

SELECTION GUIDE

12005

Reference



box
C1



actuator
A1FE



terminal
P1



contacts
S

CONNECTION DIAGRAM

