

31.000 SERIES

SWITCHES PUSHBUTTON

SPECIFICATIONS:


ELECTRICAL CHARACTERISTICS : 2A with resistive load 120VAC or 1A with resistive load 250VAC. (S contact)

CONTACT RESISTANCE: maximum of 20 miliohms with 1A DC.

INSULATION RESISTANCE: minimum of 1.000 megaohms.

DIELECTRIC WITHSTAND: 1.000V(RMS) for 1 minute (minimum).

OPERATION TEMPERATURE: from 0°C to 55°C.



REFERENCES

SINGLE-POLE

Reference	ON	OFF
31.123	ON	OFF
31.127	(ON)	OFF




FINDER

Reference	light finder
31.000	light finder

() Momentary


Note: Possible options with lamp 120/250 VAC.

Other tensions call us.

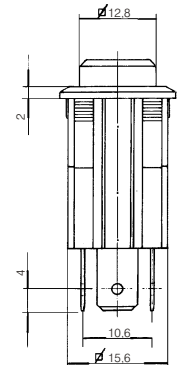


FRAME

M1# - Standard




ACTUATORS

T1# - illuminated




T2# - standard




TERMINALS


E2 - faston 4,7 x 0,8



E3 - faston 6,3 x 0,8



S1 - solder



CONTACT

S- Standard

2A with resistive load 120VAC

1A with resistive load 250VAC

- COLORS

Note: Substitute # by the code of requested color.

A - blue

B - white

C - yellow

D - green


E - red

F - black - (standard)

G - gray

H - brown

CUT FOR FIT



SELECTION GUIDE

Switch

□ □ □ □ □	□ □ □	□ □ □	□ □	□
Reference	frame	actuator	terminal	contact
	M1#	T1# T2#	E2 E3 S1	S

Light finder

31000	□ □ □	□ □ □	□ □
Reference	frame	actuator	terminal
	M1#	T1#	E2 E3 S1

OPTIONAL

A1 - SET FOR ROUND HOLE

Note: This set is formed by 2 similar pieces, being one put on the external side of the panel and the other one in the internal side for fixation of the switch.

SELECTION GUIDE

□ □ □
A1#
(optional)

