


EXTENSIONS

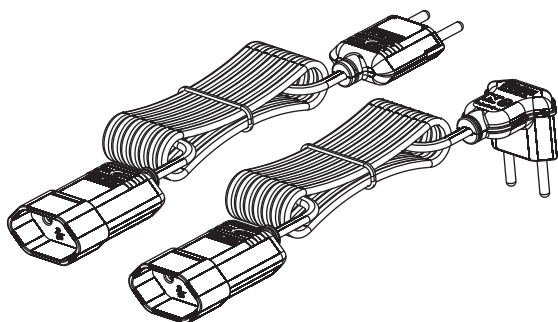

DISMOUNTABLE EXTENSION CORDS

SPECIFICATIONS:

Thermoplastic cover
Maximum power: 1200W in 127V~ and 2500W in 250V~.
Certified cable according to brazilian standard NBR NM 247
Plug and socket according to brazilian standards NBR NM 60884-1 and NBR 14136




REFERENCE	Nominal current (A)	Outlet of cables	Plug pins (Ø mm)	Cable type	Cable Gauge (mm²)
EXD1-2J	10	180°	4,0mm solid	Flexible cord parallel - PVC	2 x 0,75
EXD1-2P	10	180°	4,0mm solid	Flexible cord parallel - PVC	2 x 1
EXD1-2L*	10	180°	4,0mm solid	Flexible cord PP flat - PVC	2 x 0,75
EXD1-2O*	10	180°	4,0mm solid	Flexible cord PP flat - PVC	2 x 1
EXD2-2J	10	90°	4,0mm solid	Flexible cord parallel - PVC	2 x 0,75
EXD2-2P	10	90°	4,0mm solid	Flexible cord parallel - PVC	2 x 1
EXD2-2L*	10	90°	4,0mm solid	Flexible cord PP flat - PVC	2 x 0,75
EXD2-2O*	10	90°	4,0mm solid	Flexible cord PP flat - PVC	2 x 1


* On request.

DIMENSIONS


PLUG 180°

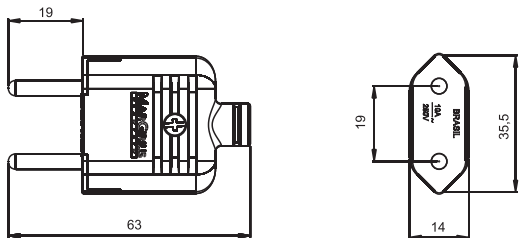

PLUG 90°

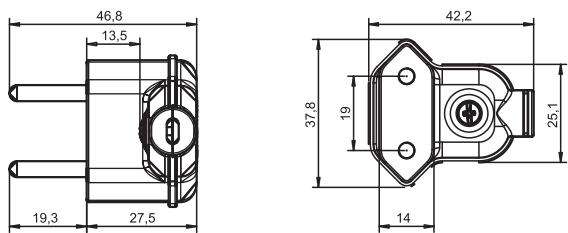

OUTLET

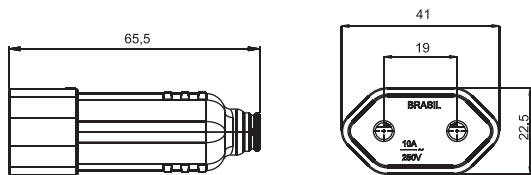

CABLE LENGHT

Cód.	Dimensions
020	2 m
030	3 m
050	5 m

Note: Call us for other measures

COLORS

Blue
Beige
White
Gray
Mustard
Black (Standard)
Green
Red

SELECTION GUIDE

EXD	☐	-	☐ ☐	☐ ☐ ☐	☐
Reference			cable lenght		color

Note: Extensions with flexible cable PP flat only on request.