


COMPACT PHOTORELAY

For automatic control of lamps and luminaires, based on variations in natural light.

NC type relays (turns on at night), with contacts that remain on during the night and off during the day.

Suitable for country houses, residences, parking lots, gardens, lampposts, condominiums and other locations.

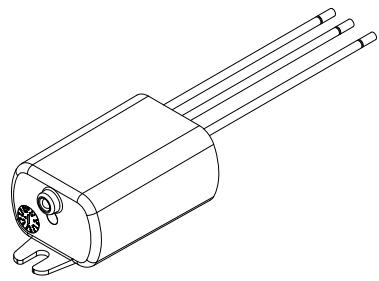


ELECTRICAL CAPACITY

Models	Lamps		Incandescent or mixed	LED*	Other loads
	127V~	220V~	127/220V~	127V~	220V~
RFE-05	250W	250W	70W	600VA	600VA
RFE-10	500W	500W	125W	1200VA	1200VA
RFE-11	1000W	1000W	200W	1200VA	1800VA

* Do not install more than 7 LED lamps on the same relay.



DIMENSIONS

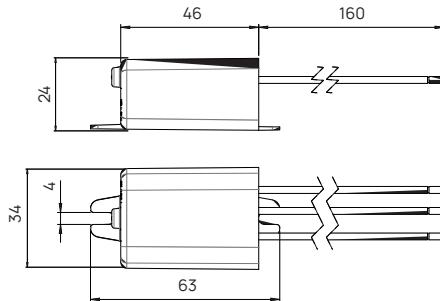

WIRING DIAGRAM

a) For automatic control:

b) For automatic and manual control: The switch allows the lamps to remain off at night, if convenient.

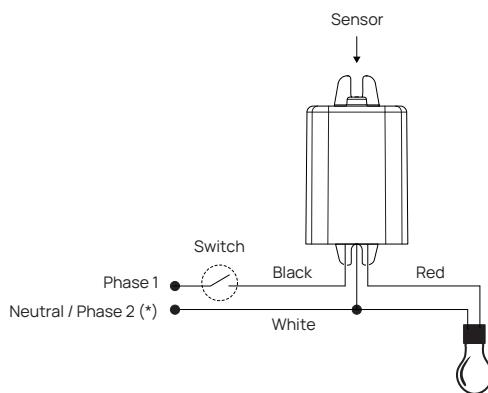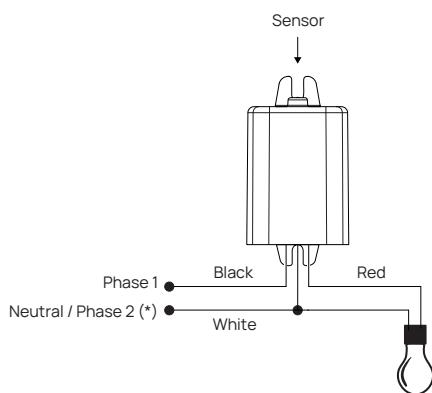

(*) According to local power grid.

Note.: The colors of the cables can be changed without prior notice.

SELECTION GUIDE

RFE - □□

Model

05
10
11