

PHOTOELECTRONIC RELAY


For the automatic control of lamps, according to variations in natural light.

LN type relays (turn on at night), with contacts that remain on at night and off during the day.

Indicated for country houses, residences, parking lots, gardens, poles, condominiums and other places.



MODELS:



RFE-130/150
With cables



RFE-131/151
With ABNT NBR-5123
Standard connector

FEATURES

Automatic bivolt: 127/220V~ 50/60 Hz

Operating temperature: -5 to 50°C


ELECTRIC CAPACITY

Lamps Models	Incandescent or Mixed		High Intensity Discharge (HID)	LED*	Other loads	
	127V~	220V~	127/220V~	127/220V~	127V~	220V~
RFE-130 / 131	600W	1000W	400W	200W	----	----
RFE-150 / 151	800W	1200W	400W	300W	1200VA	1800VA


* Do not install more than 7 lamps, fixtures or led reflectors in the same relay.

WIRING DIAGRAM

A) For automatic command




B) For automatic and manual control: the switch permits that the lamps stay off at night, if convenient.

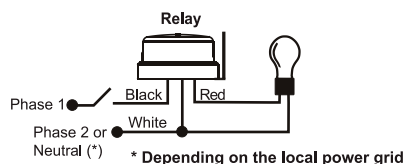


Note: The colors of the cables may be changed without previous notice.
Check the product manual before installation.

DIMENSIONS



RFE-130/150



RFE-131/151

VOLTAGE

6 - Bivolt

PACKAGE

P - Plastic bag

OPTIONAL*



* Outlet for RFE-131/151. Sold separately.

SELECTION GUIDE

RFE -	Model	Voltage	Programation	Packing
	130 131	6	P0	P
	150 151			