


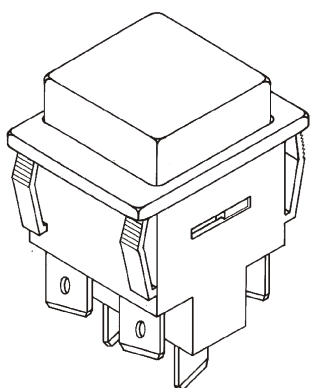

27.000 SERIES

PUSHBUTTON SWITCHES

SPECIFICATIONS:

ELECTRICAL CHARACTERISTICS: 15A with resistive load
120 VAC or 10A with resistive load 250 VAC. (Q contact)

CONTACT RESISTANCE: maximum of 20 milliohms with 1A DC.

INSULATION RESISTANCE: minimum of 1.000 megaohms.

DIELECTRIC WITHSTAND: 1.000 V (RMS) for 1 minute (minimum).

OPERATION TEMPERATURE: from 0°C to 55°C.



REFERENCE

Single-Pole

Reference	ON	OFF
27.123	ON	OFF
27.127	(ON)	OFF

Double-Pole


Reference	ON	OFF
27.223	ON	OFF
27.227	(ON)	OFF

Finder

Reference	Light finder
27.000	Light finder

() Momentary



Note: Possible options with lamp 120/250 VAC.
For other tensions call us.
Independent lamp of contacts.

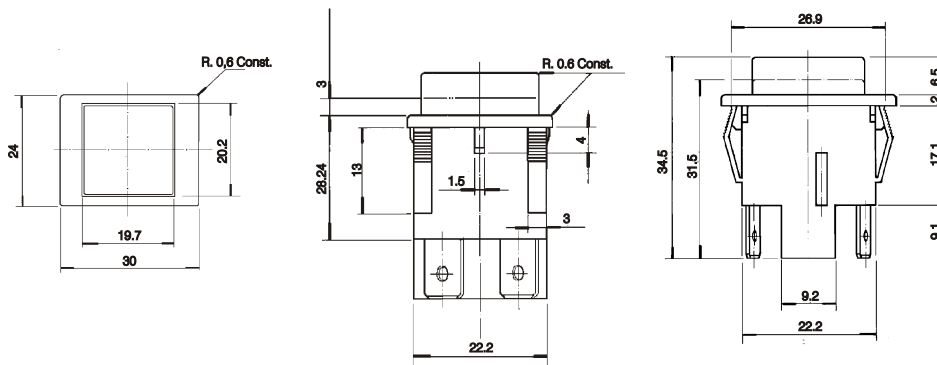

FRAMES

M1# - 24mm x 30mm



M2# - with cover



ACTUATORS


T1# - illuminated

T2# - standard



TERMINAL

E3 - faston 6,3 x 0,8



CONTACTS

S - Standard
4A with resistive load 120VAC
2A with resistive load 250VAC

Q
15A with resistive load 120VAC
10A with resistive load 250VAC

G
20A with resistive load 120VAC
15A with resistive load 250VAC


- COLORS

Note: Substitute # by the code of requested color.

A - blue
B - white
C - yellow
D - green

E - red
F - black - (standard)
G - gray
H - brown

CUT FOR FIT



SELECTION GUIDE

Switches

□ □ □ □ □	□ □ □	□ □ □	□ □	□
Reference	frame	actuator	terminal	contact
	M1#	T1#	E3	S
	M2#	T2#		Q
				G

Light finder

27000	□ □ □	□ □ □	□ □
Reference	frame	actuator	terminal
	M1#	T1#	E3