


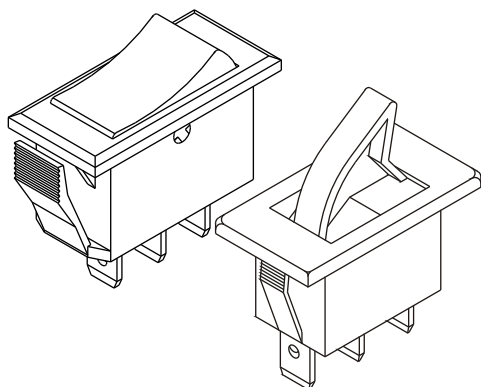

28.000 SERIES

ROCKER SWITCHES

SPECIFICATIONS:

ELECTRICAL CHARACTERISTICS : 10A with resistive load

120VAC or 6A with resistive load 250VAC. (Q contact)

CONTACT RESISTANCE: maximum of 20 miliohms with 1A DC.

INSULATION RESISTANCE: minimum of 1.000 megaohms.

DIELECTRIC WITHSTAND: 1.000V(RMS) for 1 minute (minimum).

OPERATION TEMPERATURE: from 0°C to 55°C.



REFERENCES

Reference			
28.101	ON	..	ON
28.103	ON	OFF	ON
28.105	(ON)	OFF	(ON)

Reference			
28.107	ON	OFF	(ON)
28.108	ON	..	(ON)
28.123	ON	..	OFF


Reference		
28.127	(ON)	OFF
28.129	ON	(OFF)

() Momentary


FRAME

ACTUATORS




M1# - Standard



T1#




T2# - Standard







FRAME

ACTUATOR

M2#




T3#




TERMINALS

S1 - solder



E2 - faston 4,7 x 0,8



CONTACTS

S - Standard

6A with resistive load 120VAC

3A with resistive load 250VAC

Q

10A with resistive load 120VAC

6A with resistive load 250VAC

- COLORS

Note: Substitute # by the code of requested color.

A - blue

B - white

C - yellow

D - green

E - red


F - black - (standard)

G - gray


H - brown

CUT FOR FIT

M1#



M2#



SELECTION GUIDES

M1#



Reference



frame

M1#



actuator

T1#

T2#



terminal

S1

E2



contacts

S

Q

M2#



Reference



frame

M2#



actuator

T3#



terminal

S1

E2



contacts

S

Q