




*for Y contact only

41.000 SERIES

PUSHBUTTON SWITCHES

SPECIFICATIONS:

ELECTRICAL CHARACTERISTICS: 16(6)A with resistive load 250VAC (Y Contact).

CONTACT RESISTENCE: maximum of 10 miliohms with 1A DC.

INSULATION RESISTANCE: minimum of 1.000 megaohms.

DIELECTRIC WITHSTAND: 1.000V(RMS) for 1 minute (minimum).

OPERATION TEMPERATURE: 0°C to 125°C.




REFERENCES

Single-Pole

Reference		
41.123	ON	OFF
41.125	OFF	ON
41.127	(ON)	OFF


() Momentary

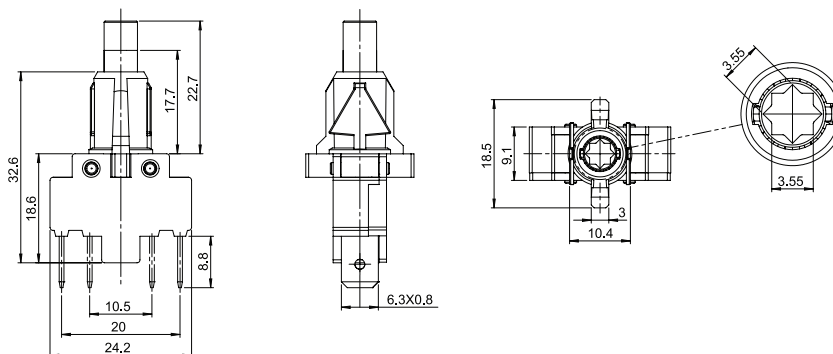

Double-Pole


Reference		
41.223	ON	OFF
41.225	OFF	ON
41.227	(ON)	OFF

() Momentary

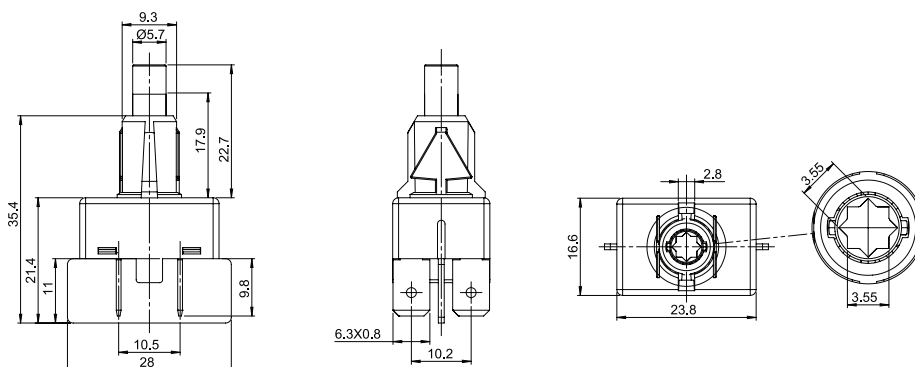


ACTUATOR


A1 - (Standard)



A2




A3




FIXATION

B1




B2



TERMINAL

E2 - faston 4,8 x 0,8 E3 - faston 6,3 x 0,8

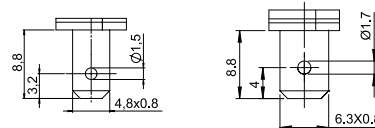

Note: Terminals with internal assembly (I) or external assembly (E)² option.

CONTACT


Y - 16(6)A - 250V~



S - 4A - 250V~¹

¹ Available for references 41.123 and 41.127.

CUT FOR FIT

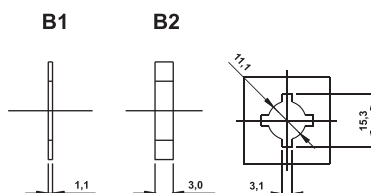

SELECTION GUIDE

Reference	actuator	fixation	terminal	contact
	A1	B1	E3E ²	Y
	A2	B2	E3I	S
	A3		E2E	
			E2I	

² External mounting option is not available for references 41.223 and 41.227.