

46.000 SERIES

PUSHBUTTON SWITCH

SPECIFICATIONS:

ELECTRICAL CHARACTERISTICS: 12(10)A - 250V~. (B Contact)

CONTACT RESISTANCE: maximum of 20 miliohms with 1A DC.

INSULATION RESISTANCE: minimum of 1.000 megaohms.


DIELECTRIC WITHSTAND: 1.250V(RMS) for 1 minute (minimum).

OPERATION TEMPERATURE: from 0°C to 100°C.

Certified product*



*Call us



REFERENCES


Single-Pole

Reference		
46123	ON	OFF
46127	ON	(OFF)

() Momentary


Double-Pole

Reference		
46223	ON	OFF
46227	ON	(OFF)

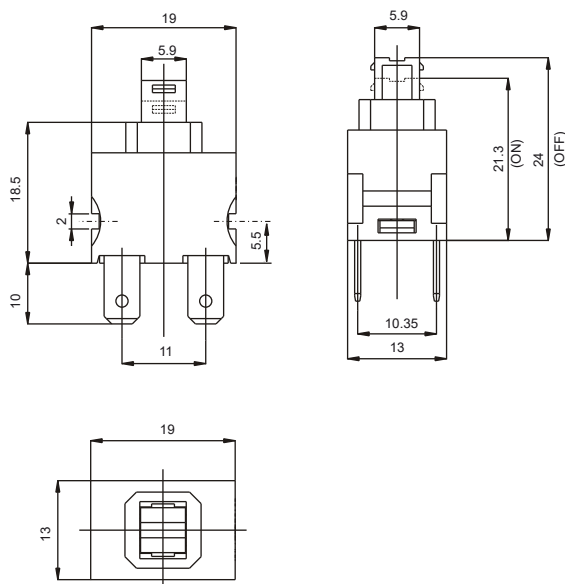


BOX

C1 - (standard)




C2




ACTUATOR

A1




A2




Note.: The actuator A2 is available only with C1 box.

TERMINAL

W1 - Radials - 4,8 x 0,8



W2 - Axis - 4,8 x 0,8




CONTACT

B

12(10)A 250V~ (10.000 cycles)

10(8)A 250V~ (50.000 cycles)

CUT FOR FIT



SELECTION GUIDE

Reference	box	actuator	terminal	contact
	C1	A1	W1	B
	C2	A2	W2	