

Certified Product*



*Call us

50.000 SERIES

PUSHBUTTON SWITCHES

SPECIFICATIONS:

ELECTRICAL CHARACTERISTICS: 0,5(0,5)A in 250V~. (Contact S)

CONTACT RESISTANCE: maximum of 20 miliohms with 1A DC.

INSULATION RESISTANCE: minimum of 1.000 megaohms.

DIELECTRIC WITHSTAND: 1.250V(RMS) for 1 minute (minimum).


OPERATION TEMPERATURE: from 0°C to 85°C.



REFERENCES


Reference			Function
50.108	(ON)	ON	IR
50.127	(ON)	OFF	NA
50.129	(OFF)	ON	NF

() Momentary

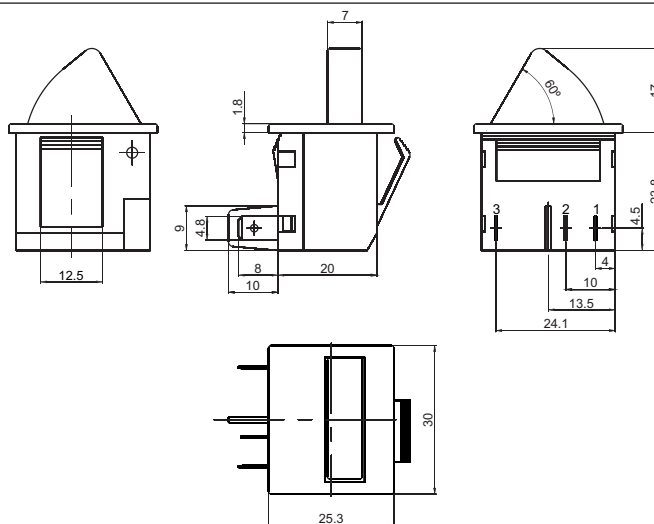


FRAME

M1#




ACTUATORS

A1#




A2#



TERMINAL

E2 - Faston - 4,8 x 0,5



CONTACTS


S - Standard
0,5(0,5)A 250V~ (100.000 ciclos)

- COLORS

Note: Substitute # by the code of requested color.

- A - blue
- B - white
- C - yellow
- D - green
- E - red
- F - black - (standard)
- G - gray
- H - brown

CUT FOR FIT



SELECTION GUIDE

59.129

Reference



frame
M1#



actuator
A1#
A2#



terminal
E2



contact
S